





CE RoHS REACH UK CA

GHS Pro Ribbon Screw Clip

FEATURES

Easy to Use

Fix and connect by screw that anyone can operate

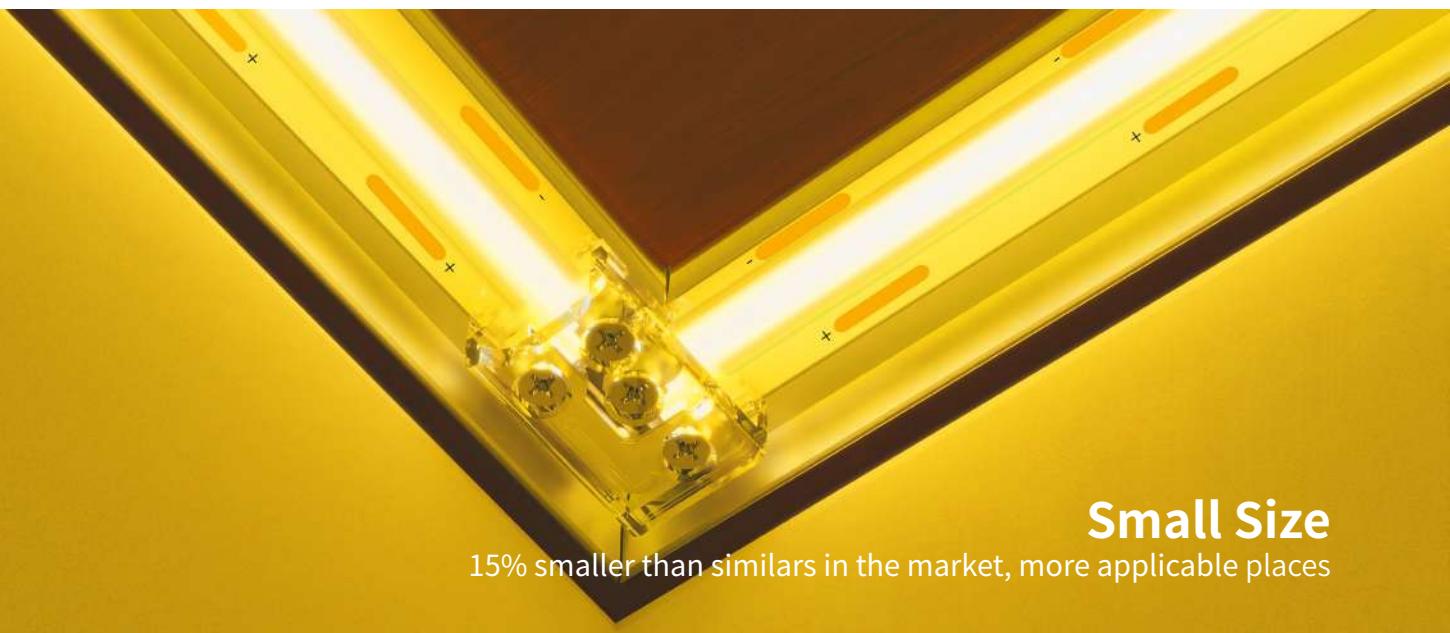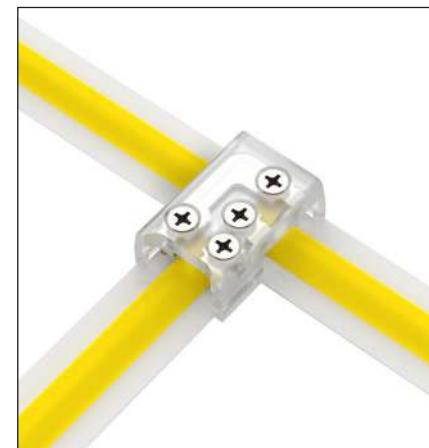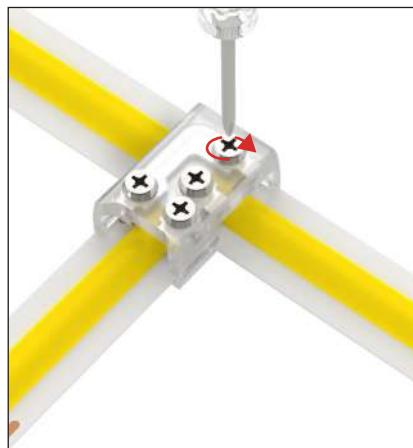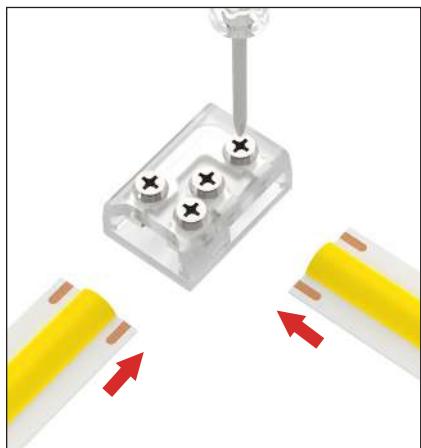

Small Size

15% smaller than similars in the market, more applicable places



Stable Current

Screw fixing ensure contact area firm enough while working, which makes current pass stably


CONNECTION FORM




L Shape



T Shape

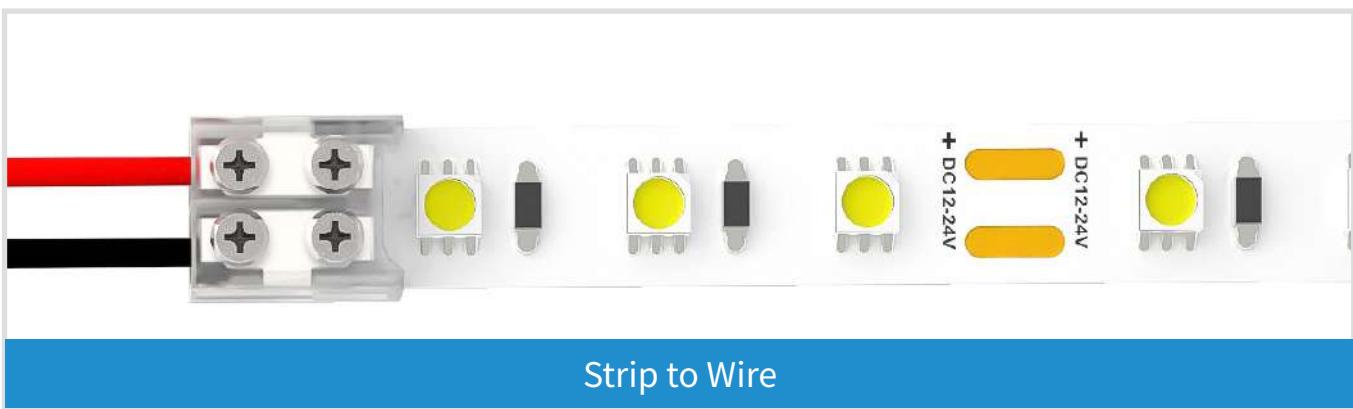

Strip to Wire

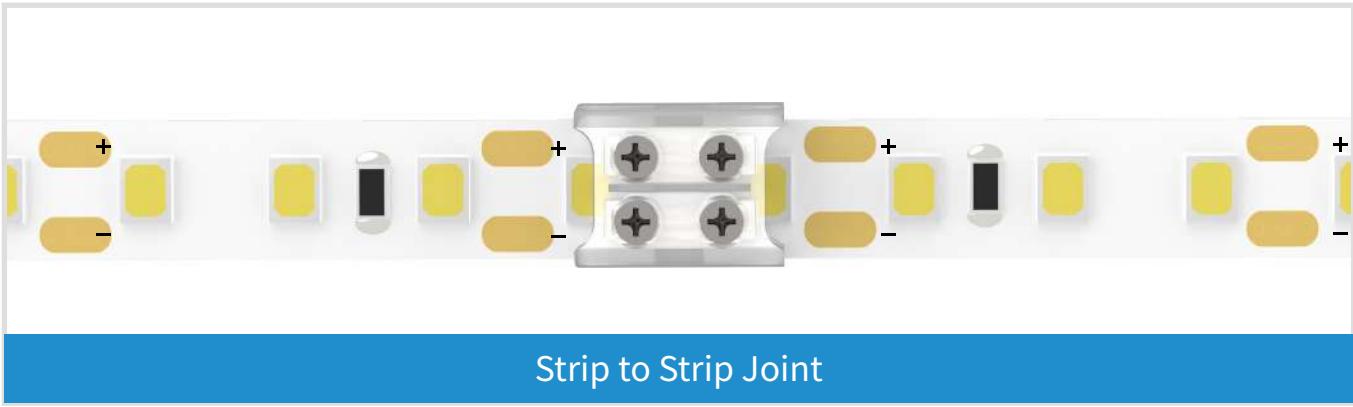

Strip to Strip Joint



Strip to Strip Bridge



COMMON PARAMETER

LED Strip Width:	8mm / 10mm
Pin Quantity:	2 Pins
Material:	Policarbonate (PC), Copper
LED Strip IP Rating:	IP20
Working Voltage:	DC3~24V
Working Current:	Max 3.5~5A(Depend On Item NO. and PCB to work with)
Wire Gauge:	Work with 22AWG/0.32mm ² ~14AWG/2mm ²
Wire Length:	No wire in default
LED Strip Thickness:	Below 1.0 mm
LED Light Type:	SMD / COB
LED Density:	No limit to COB, SMD Depends on SMD Size
Standard Package Method:	PE Bag + Label + Carton

Customization is acceptable, wire length, gauge, color and connector,etc.

SELECTION

For 8mm Mono Color Strip

Item NO.	Connection Form	Dimension	Picture
8-TL2	L Shape / T Shape	16.3*11.4*6.4mm	
8BB-2G	Strip to Strip Joint	14.6*11.5*6.4mm	
8XB-2G	Strip to Wire	13.3*11.5*6.4mm	
8-2G-K01	/	/	

For 10mm Mono Color Strip

Item NO.	Connection Form	Dimension	Picture
10-TL2	L Shape / T Shape	16.3*11.4*6.4mm	
10BB-2G	Strip to Strip Joint	14.6*11.5*6.4mm	
10XB-2G	Strip to Wire	13.3*11.5*6.4mm	
10-2G-K01	/	/	