

MAKING WAVES THROUGH
SOUND AND VISION



S P E C I A L P R O J E C T S L T D

Architectural LED Pro Series Tape LED Solutions

TAPE

Ghs Special Projects Ltd
GHS House
Manchester

+44 0161 737 7333
Email: sales@ghsspecialprojects.com
Website: www.ghsspecialprojects.com

CUSTOM
ELECTRONIC
DESIGN &
INSTALLATION
ASSOCIATION

CEDIA



MAKING WAVES THROUGH ~ SOUND AND VISION



Pro Series Ribbon Tape



GHSSMCOB24276 / 9.6Watt perMetre
LED Tunable Seamless COB Constant Voltage

Tunable White Seamless Ribbon Strip offers versatility in providing the exact colour temperature light required for your project. This Dual LED solution is designed for seamless integration, providing dynamic control over colour temperature to suit any mood or setting. It is compatible with DMX, 0–10V, and DALI protocols, and works seamlessly with professional controllers such as Rako, Lutron, Crestron, and many other dimmer systems.

Features: Tunable single CCT mix - 5M Length

• Wattage	9.6Watt
• Single board-circuit body	Seamless
• Installation	Adhesive Tape
• Cable	3 Core
• Control	Triac/0-10/DMX/KNX
• Cutting points	28mm
• Constant Voltage PSU	24Volt
• Beam angle	180°
• IP option	IP20
• Colour Rendering Index	CRI> 80Ra+
• CCT:	(Kelvin) 2700K/3000K/4000K/5500K/6000K
• Dimensions: (custom)	L: 5 Metre x 8mm x 2mm

*Bespoke lengths available

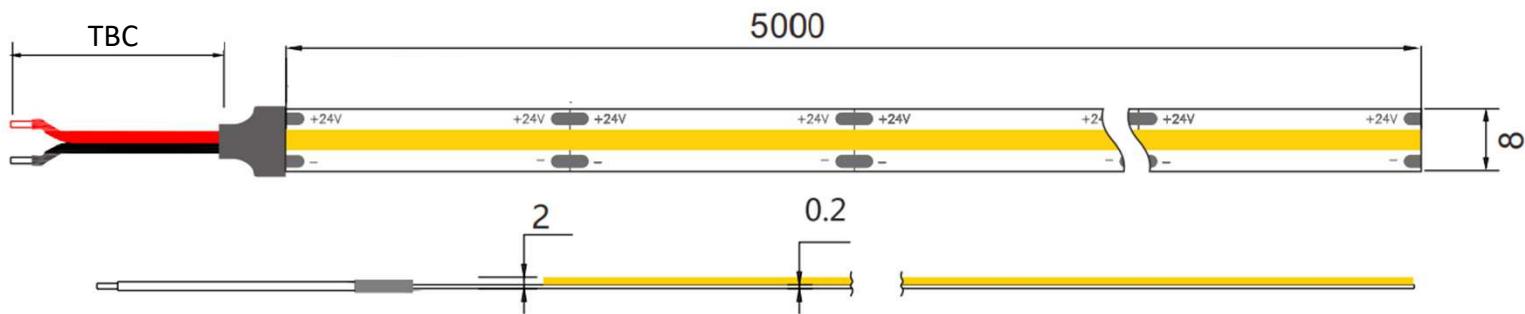



Pro Series Ribbon Tape

GHSF0603ASAT24/14W perMetre

LED Tunable Seamless COB Constant Voltage

Tunable White Seamless Ribbon Strip offers versatility in providing the exact colour temperature light required for your project. This Dual LED solution is designed for seamless integration, providing dynamic control over colour temperature to suit any mood or setting. It is compatible with DMX, 0–10V, and DALI protocols, and works seamlessly with professional controllers such as Rako, Lutron, Crestron, and many other systems.

Features: Tunable single CCT mix - 5M Length


- ∅ Wattage 14Watt
- ∅ Single board-circuit body Seamless
- ∅ Installation Adhesive Tape
- ∅ Cable 3 Core
- ∅ Control Triac/0-10/DMX/KNX
- ∅ Cutting points 26mm
- ∅ Constant Voltage PSU 24Volt
- ∅ Beam angle 180°
- ∅ IP option IP20
- ∅ Colour Rendering Index CRI> 80Ra+
- ∅ CCT: (Kelvin) 2700K/3000K/4000K/5500K/6000K
- ∅ Dimensions: (custom) L: 5 Metre x 10mm x 2mm

*Bespoke lengths available – (1~30M single length - Bespoke lengths available)

Ref:

IP20 14W = GHSF0603A304SAT24COBCES

IP67 14W = GHSF0603C304SAT24COBCES

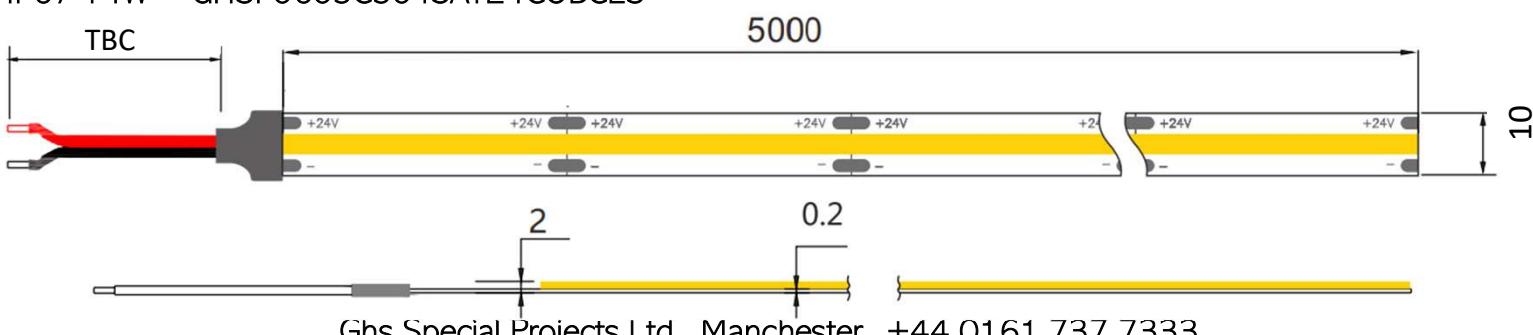



Pro Series Ribbon Tape

GHSF0603ASAT24/19W perMetre
LED Tunable Seamless COB Constant Voltage

Tunable White Seamless Ribbon Strip offers versatility in providing the exact colour temperature light required for your project. This Dual LED solution is designed for seamless integration, providing dynamic control over colour temperature to suit any mood or setting. It is compatible with DMX, 0–10V, and DALI protocols, and works Seamlessly with professional controllers such as Rako, Lutron, Crestron, and many other systems.

Features: Tunable single CCT mix - 5M Length



- ⦿ Wattage 19Watt
- ⦿ Single board-circuit body Seamless
- ⦿ Installation Adhesive Tape
- ⦿ Cable 3 Core
- ⦿ Control Triac/0-10/DMX/KNX
- ⦿ Cutting points 41mm
- ⦿ Constant Voltage PSU 24Volt
- ⦿ Beam angle 180°
- ⦿ IP option IP20
- ⦿ Colour Rendering Index CRI> 80Ra+
- ⦿ CCT: (Kelvin) 2700K/3000K/4000K/5500K/6000K
- ⦿ Dimensions: (custom) L: 5 Metre x 12mm x 2mm

*Bespoke lengths available – (1~30M single length - Bespoke lengths available

Ref:

IP20 19W = GHSF0603A504SAT24COB

IP67 19W = GHSF0603C504SA-T-24-COB

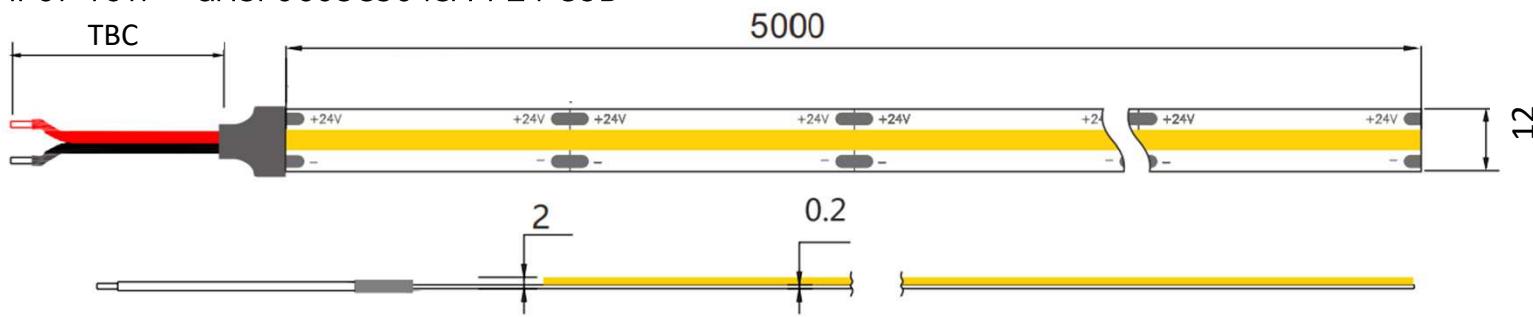



Pro Series Ribbon Tape

GHSF2216TSAH24 / 9W perMetre

LED Tunable SMD Constant Voltage

Tunable White Seamless Ribbon Strip offers versatility in providing the exact colour temperature light required for your project. This Dual LED solution is designed for seamless integration, providing dynamic control over colour temperature to suit any mood or setting. It is compatible with DMX, 0–10V, and DALI protocols, and works Seamlessly with professional controllers such as Rako, Lutron, Crestron, and many other systems.

Features: Tunable single CCT mix - 5M Length



- ∅ Wattage 9Watt
- ∅ Installation Adhesive Tape
- ∅ Cable 3 Core
- ∅ Control Triac/0-10/DMX/KNX
- ∅ Cutting points 50mm
- ∅ Constant Voltage PSU 24Volt
- ∅ Beam angle 180°
- ∅ IP option IP20
- ∅ Colour Rendering Index CRI> 80Ra+
- ∅ CCT: (Kelvin) 2700K/3000K/4000K/5500K/6000K
- ∅ Dimensions: (custom) L: 5 Metre / 10mm/12mm


*Bespoke lengths available – (1~30M single length - Bespoke lengths available

Ref:

IP20 = GHSF2216TSAH2410

IP67 = GHSF2216TSAH2412

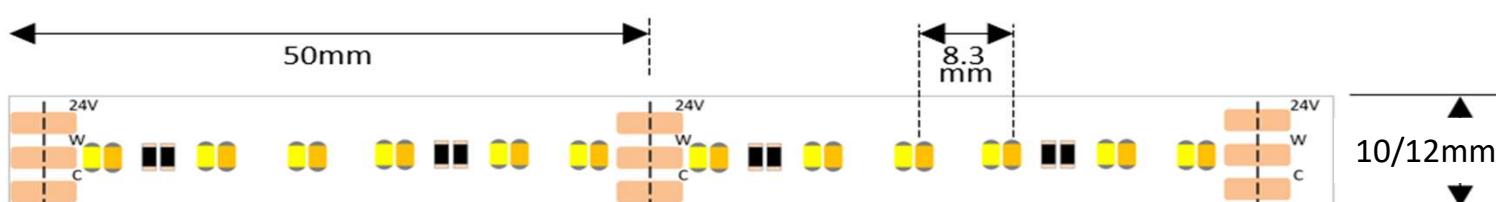

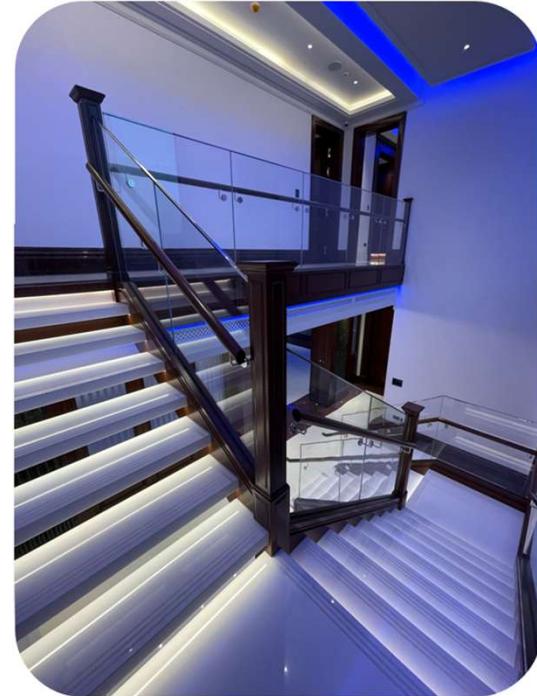

Pro Series Ribbon Tape

GHSF2216TS AH24 /19.2W–38.4W per Metre

LED Tunable SMD Constant Voltage

Tunable White Seamless Ribbon Strip offers versatility in providing the exact colour temperature light required for your project. This Dual LED solution is designed for seamless integration, providing dynamic control over colour temperature to suit any mood or setting

It is compatible with DMX, 0–10V, and DALI protocols, and works Seamlessly with professional controllers such as Rako, Lutron, Crestron, and many other systems..


Features: Tunable single CCT mix - 5M Length

• Wattage	19.2Watt / 38.4Watt
• Cutting points	50mm / 25mm
• Installation	Adhesive Tape
• Cable	3 Core
• Control	Triac/0-10/DMX/KNX
• Constant Voltage PSU	24Volt
• Beam angle	180°
• IP option	IP20 / IP65
• Colour Rendering Index	CRI> 80Ra+
• CCT:	(Kelvin) 2700K/3000K/4000K/5500K/6000K
• Dimensions: (custom)	L: 5 Metre / 10mm/12mm


*Bespoke lengths available – (1~30M single length - Bespoke lengths available



Ref: IP20 = GHSF2216A120TS AH24 – IP67 = GHSF2216X120TS AH24

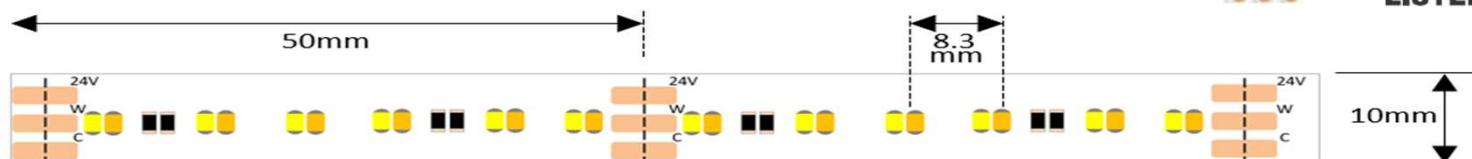

Ref: IP20 = GHSF2216X120TS AH24

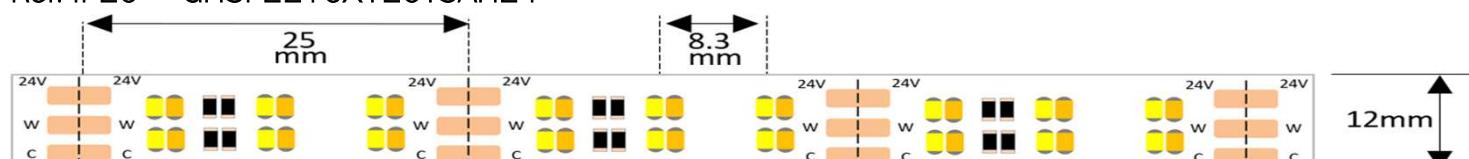



Pro Series Ribbon Tape


GHSF2216A60SADTW24/10W-20W perMetre

LED Tunable SMD Constant Voltage

Dim to Warm Ribbon Strip offers perfect dimming from neutral white to very warm white; the colour temperature of the light just dims to a lovely cosy yellow 1800 colour temperature of white perfect for your home or project. This Dual LED solution is designed for seamless integration, providing dynamic control over colour temperature to suit any mood or setting. It is compatible with DMX, 0–10V, and DALI protocols, and works Seamlessly with professional controllers such as Rako, Lutron, Crestron, and many systems.

Features: Tunable single colour mix - 5M Length

• Single board-circuit body	
• Wattage Options PerM	10W - 20W
• cutting points	100mm - 50mm
• Constant Voltage	@24Volt
• Lumen per metre	950lm - 1900lm
• Beam angle	120°
• LED chip	(2216) 120 - 240 pcs PerM
• IP option	IP20-IP67
• Colour Rendering Index	CRI> 95+Ra
• CCT: (Kelvin)	1800K/2800K
• Average lifetime	50,000 hours
• Dimensions: (mm)	10 X 2 – 12 X 2
(As standard 5M length – (1~30M single length - Bespoke lengths available))	




100mm




10mm

Ref: 10W IP20 = GHSF2216A60SADTW24 – IP67 = GHS F2216C60SADTW24

50mm



12mm

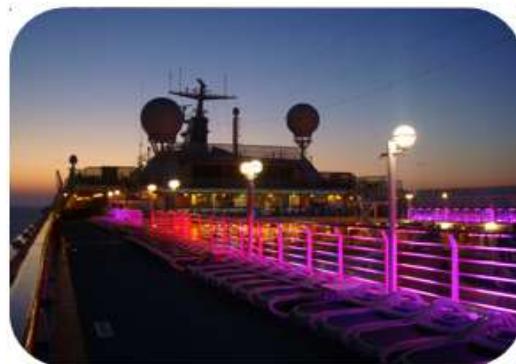

Pro Series Ribbon Tape

GHSF5050A30WPC24 / 24Watt PerMetre
LED SMD Constant Current Voltage Protection

RGB+WW Ribbon Strip offers great variation of colour mixing and dimming from neutral white to very warm white; the colour temperature of the light adds mood lighting and task lighting from one single strip perfect for your home or project. This LED solution is designed for seamless integration through colours of any choice, providing dynamic control over colour temperature to suit any mood or setting. It is compatible with DMX, 0–10V, and DALI protocols, and works Seamlessly with professional controllers such as Rako, Lutron, Crestron, and many other dimmer systems.

Features: RGBWW colourMix - 5M Length

- ∅ Single board-circuit body Constant Current & Constant Voltage
- ∅ Wattage Options PerM 24W
- ∅ cutting points 6 LEDs 100mm
- ∅ Constant Voltage @24Volt
- ∅ Beam angle 120°
- ∅ LED chip (5050) 60 pcs PerM
- ∅ IP option IP20-IP67
- ∅ Average lifetime 50,000 hours
- ∅ Colour Rendering Index CRI > 95+Ra
- ∅ White CCT: (Kelvin) RGB 2500K/6000K





- ∅ Dimensions: (mm) 12 X 2

(As standard 5M length – (1~30M single length - Bespoke lengths available)

Ref: IP20 = GHSF5050A30WPC24IP20

Ref: IP67 = GHSF5050A30WPC24IP67

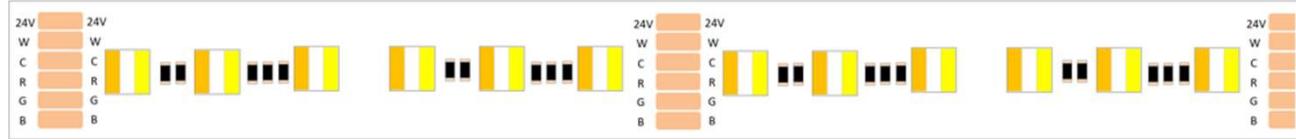

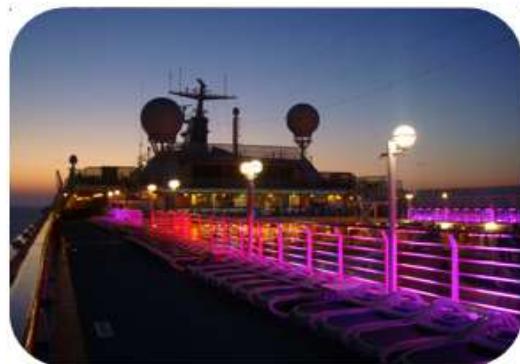

Pro Series Ribbon Tape

GHSF5050RGBW / 19Watt PerMetre
LED SMD Constant Current Voltage Protection

RGB+W Ribbon Strip offers great variation of colour mixing and dimming from neutral white to very warm white; the colour temperature of the light adds mood lighting and task lighting from one single strip perfect for your home or project. This LED solution is designed for seamless integration through colours of any choice, providing dynamic control over colour temperature to suit any mood or setting. It is compatible with DMX, 0–10V, and DALI protocols, and works Seamlessly with professional controllers such as Rako, Lutron, Crestron, and many other dimmer systems.

Features: RGBWW colourMix - 5M Length

- ⦿ Single board-circuit body Constant Current & Constant Voltage
- ⦿ Wattage Options PerM 24W
- ⦿ cutting points 6 LEDs 100mm
- ⦿ Constant Voltage @24Volt
- ⦿ Beam angle 120°
- ⦿ LED chip (5050) 60 pcs PerM
- ⦿ IP option IP20-IP67
- ⦿ Average lifetime 50,000 hours
- ⦿ Colour Rendering Index CRI > 95+Ra
- ⦿ White CCT: (Kelvin) RGB 2500K/6000K






- ⦿ Dimensions: (mm) 12 X 2

(As standard 5M length – (1~30M single length - Bespoke lengths available)

Ref: IP20 = GHSF5050A30WPC24IP20

Ref: IP67 = GHSF5050A30WPC24IP67

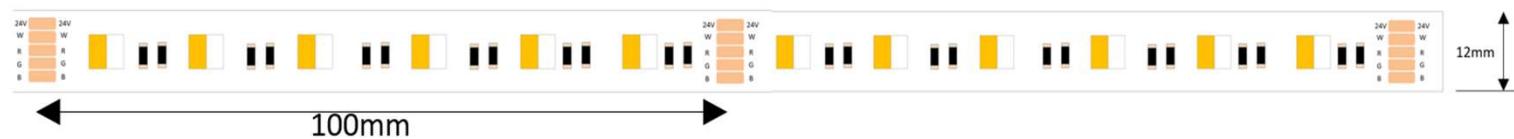

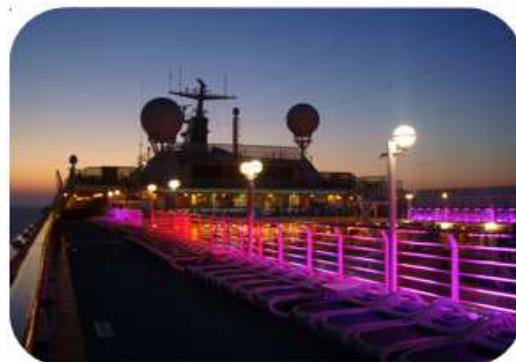

Pro Series Ribbon Tape


GHSQL1006 / 28Watt PerMetre

LED SMD Constant Voltage


RGB Ribbon Strip offers great variation of colour mixing and dimming from neutral white to very warm white; the colour temperature of the light adds mood lighting and task lighting from one single strip perfect for your home or project. This LED solution is designed for seamless integration through colours of any choice, providing dynamic control over colour temperature to suit any mood or setting. It is compatible with DMX, 0–10V, and DALI protocols, and works Seamlessly with professional controllers such as Rako, Lutron, Crestron, and many other dimmer systems.

Features: RGB colourMix - 5M Length

- ⦿ Single board-circuit body Constant Current & Constant Voltage
- ⦿ Wattage Options PerM 24W
- ⦿ cutting points 6 LEDs 100mm
- ⦿ Constant Voltage @24Volt
- ⦿ Beam angle 120°
- ⦿ LED chip (3535) 120 pcs PerM
- ⦿ IP option IP20
- ⦿ Average lifetime 50,000 hours
- ⦿ Colour Rendering Index CRI > 95+Ra
- ⦿ Colour RGB
- ⦿ Dimensions: (mm) 12 X 3
- ⦿ (As standard 5M length)



50mm

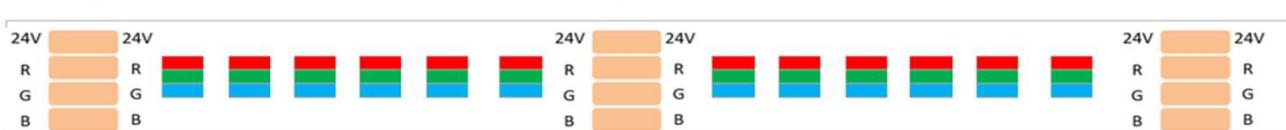

8mm




GHSSC1050LENS/RGBW / 10Watt PerMetre LED SMD Constant Voltage

RGB+WW Ribbon Strip offers great variation of colour mixing and dimming from neutral white to very warm white; the colour temperature of the light adds mood lighting and task lighting from one single strip perfect for your home or project. This LED solution is designed for seamless integration through colours of any choice, providing dynamic control over colour temperature to suit any mood or setting. It is compatible with DMX, 0–10V, and DALI protocols, and works Seamlessly with professional controllers such as Rako, Lutron, Crestron, and many other dimmer systems.



Features: RGBW colourMix - 10M Length

- ❖ Single board-circuit body Constant Voltage
- ❖ Wattage Options PerM 10W
- ❖ cutting points 6 LEDs 166mm
- ❖ Constant Voltage @24Volt
- ❖ Beam angle 40°/50°/60°
- ❖ LED chip (5050) 36 pcs PerM
- ❖ IP option IP67
- ❖ Average lifetime 50,000 hours
- ❖ Colour Rendering Index CRI> 95+Ra
- ❖ Colour RGB
- ❖ Dimensions: (mm) 20 X 9.5
(As standard 1-10M length)

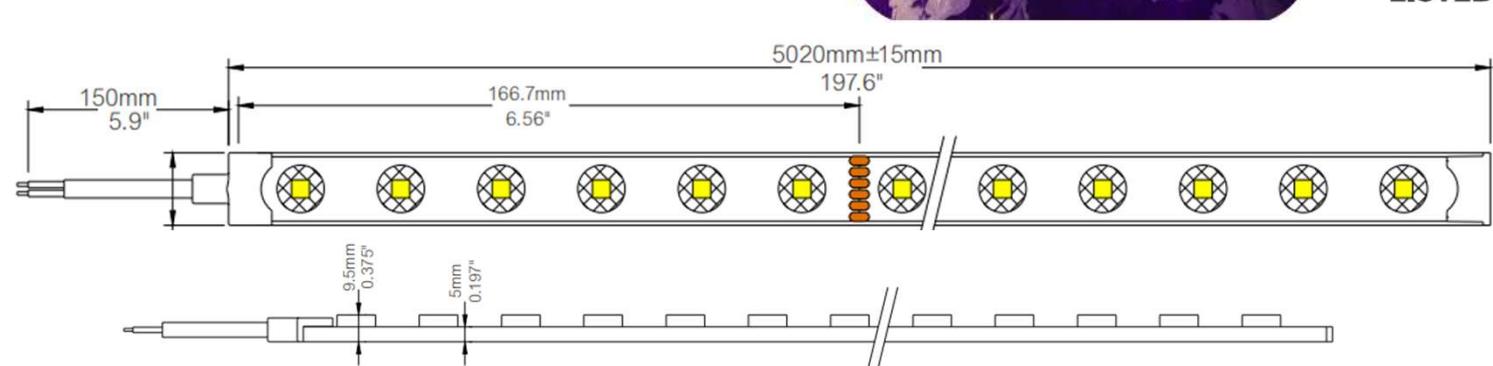


LED Profile Extrusion

LED Profile extrusions


This is our high grade professional durable solution for installing LED ribbon. Each extrusion is made of T5 aircraft aluminium which enhances thermal performance and protects the ribbon from heat that is produced when the LED is at its brightest level, the included diffusser reduces the visibility of direct eye contact to the bare LED and minimizes any discomfort and LED spotting on reflective surfaces.

- ⦿ 1/2/3 Metre Lengths
- ⦿ Supplied with clips & end caps where applicable
- ⦿ Frosted diffuser


PC08 Surface Mount




PC28 Surface Mount




PC07 Surface Mount




PC16 Corner Mount




PC17 Corner Mount




PC12 Recessed




PC i1 Plaster In




PC i2 Corner Plaster In




PC i3 Plaster In



PC26 Waterproof Surface Mount



PC27 Waterproof Recessed



PC19 Surface Mount

