



Wireless
data sheet

RCPO2

2 BUTTON RF WALL PLATE CONTROLLER



WHAT IS IT?

A wireless 2 button wall mounted control panel providing on and off control.

The On button recalls preset scene one.

Lithium battery powered so can be mounted anywhere without having to run cabling.

The RCPO2 wireless push button wall plate controller with on and off buttons.



WIRE-FREE CONTROL

The RCPO2 push button wall plate controllers are designed to be mounted anywhere, be it flush mounting to UK back-boxes or simply surface mounted to any flat surface using the pattress provided.

Rakom coded radio transmission eliminates the need for any data or power cabling ensuring that the system can be installed with minimum fuss and disruption.

Flat metal cover plate accessory kits are necessary and are available in a variety of standard finishes including: white, brushed stainless steel, mirrored stainless steel and polished brass.

Versions Available: (Require seperate RPP cover plate kit)

RCPO2W - White

RCPO2C - Charcoal

Cover Plate Kits:

RPP02-W - White metal

RPP02-SS - Brushed stainless steel

RPP02-MSS - Mirrored stainless steel

RPP02-PB - Polished brass



Wireless
data sheet
RCPO2


2 BUTTON RF WALL PLATE CONTROLLER



technical data

dimensions	86x86x14mm - flush mount 92x92x14mm - surface mount
Fixing	Flush mounting into standard UK single gang back box, minimum 12mm deep. Surface mounting on standard single gang UK or European back box or direct to flat surface
input supply	6V DC - 2x 3V Lithium coin cell CR2016 (remote power supply version available)
weight	100g
Battery Life	Greater than 3 years
climate range	Temperature +2C to +40C Humidity +5% to 90% non condensing
standards	Emissions - EN61000-6-3 : 2001 Immunity - EN61000-6-1 : 2001
communication	Rakom coded fm radio, 433.9MHz
memory	Flash memory (non volatile)

mechanical data

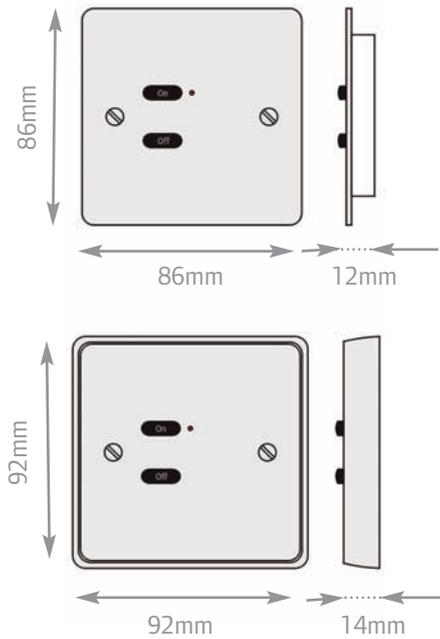

telephone +44 (0) 1634 226666 fax +44 (0) 1634 226667 www.rakocontrols.com